



MANUFACTURED

*with high-quality components
and innovative techniques*

DESIGNED

*for economical, trouble-free
performance and long-life reliability*



SUPPORTED

by a world-wide distribution network


WORLD LEADERS IN COMPRESSED AIR SYSTEM ENGINEERING



4488 Series Air-Free™ Automatic Drains

Model No. 4488-A

Operation:	Float-operated, electronic
Reservoir Capacity:	35 oz. per cycle
Valve Type:	Solenoid
Condensate Level	Visible
Max. Pressure:	200 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/4" NPT
Outlet Connection:	1/4" NPT
Electrical:	115V-1PH-60HZ
Overall Size (W x D x H):	5.5" x 8" x 13.25"
Weight:	15 lbs.



Included

Model No. 4488-AM1

Operation:	Float-operated, electronic
Reservoir Capacity:	8 oz. per cycle
Valve Type:	Solenoid
Condensate Level	Visible
Max. Pressure:	200 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/2" NPT
Outlet Connection:	1/4" NPT
Electrical:	115V-1PH-60HZ
Overall Size (W x D x H):	3.5" x 5.5" x 7.5"
Weight:	5 lbs.



Model No. 4488-AM2

Operation:	Float-operated, electronic
Reservoir Capacity:	21 oz. per cycle
Valve Type:	Solenoid
Condensate Level	Visible
Max. Pressure:	200 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/2" NPT & 3/4" NPT
Outlet Connection:	1/4" NPT
Electrical:	115V-1PH-60HZ
Overall Size (W x D x H):	6.0" x 8.0" x 7.5"
Weight:	11 lbs.




Model No. 4488-P

Operation:	Float-operated, pneumatic
Reservoir Capacity:	15 oz. per cycle
Valve Type:	Ball
Condensate Level	Visible
Max. Pressure:	200 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/2" NPT
Outlet Connection:	1/4" NPT
Overall Size (W x D x H):	6.6" x 8.0" x 7.0"
Weight:	12 lbs.



4488-ADMS Air-Free™ Drains

Model No. 4488-ADMS with Automatic Drain Management System

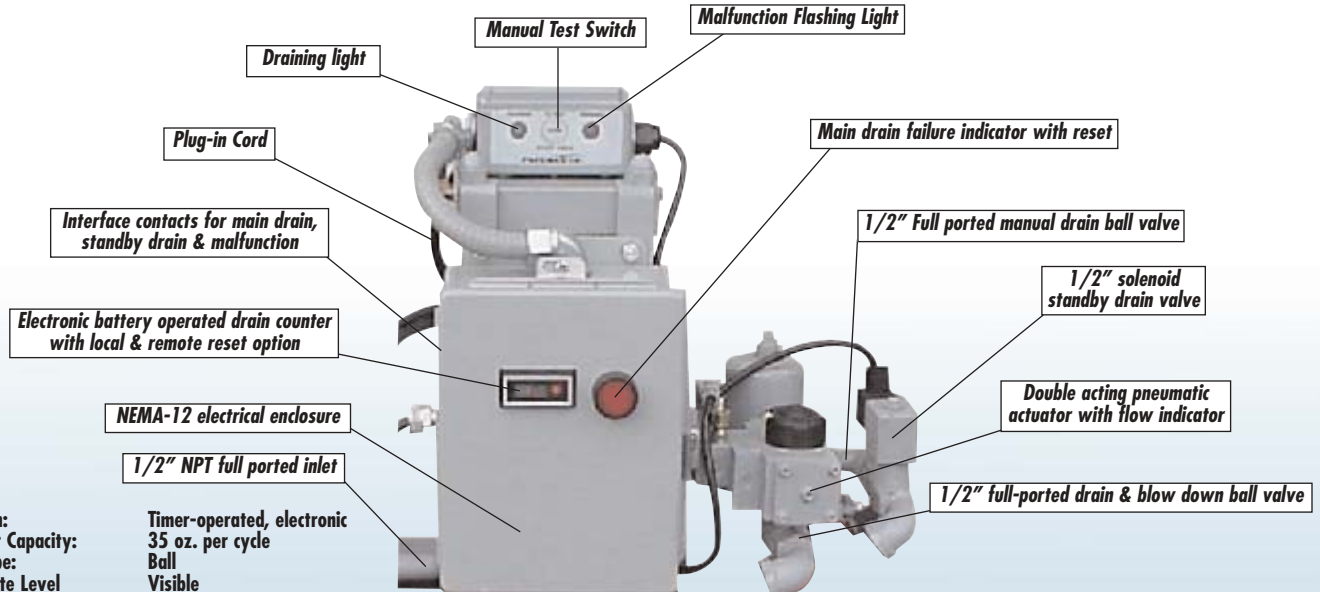

Operation: Timer-operated, electronic
Reservoir Capacity: 35 oz. per cycle
Valve Type: Ball
Condensate Level: Visible
Max. Pressure: 200 PSIG
Fluid Temp. Min-Max.: 35°F - 180°F
Inlet Connection: 1/2" NPT
Outlet Connection: 1/2" NPT
Electrical: 115V-1PH-60HZ
Overall Size (W x D x H): 12" x 10" x 13.25"
Weight: 30 lbs.

Pneumatech 4488 Air-free Drains vs. Other Brands

Model	4488-ADMS	4488-A	4488-AM1	4488-AM2	4488-P	Competitive Drain
Electric/Pneumatic	Electric & Pneumatic	Electric	Electric	Electric	Pneumatic	Pneumatic
Solenoid/Ball Valve	Ball Valve	Solenoid	Solenoid	Solenoid	Ball Valve	Ball Valve
No Control Air connection needed	NO	YES	YES	YES	YES	NO
No Air-loss	YES	YES	YES	YES	YES	NO
Alarm light	YES	YES	NO	NO	NO	NO
Remote alarm contacts	YES	YES	NO	NO	NO	NO
Standby drain valve included	YES	NO	NO	NO	NO	NO
Drain Cycle Counter	YES	NO	NO	NO	NO	NO
Max pressure rating (PSIG)	200	200	200	200	200	170
Max. Temperature (degree F)	180	180	180	180	180	170
Inlet (NPT)	1/2	1/4	1/2	1/2-3/4	1/2	1/2
Outlet (NPT)	1/2	1/4	1/4	1/4	1/4	1/2

Timer-Operated & Float Drains

Model No. 4477-A-S & 4477-A2-S

Operation:	Timer operated, electronic
Valve Type:	Solenoid
Max. Pressure:	250 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/4" NPT*
Outlet Connection:	1/4" NPT*
Cycle Time:	Adjustable, 1-60 minutes
Drain Time:	Adjustable, 1-30 seconds
Electrical:	115V-1PH-60HZ
Overall Size (W x D x H):	4477-A-S 1.25" x 6.5" x 5.5"
	4477-A2-S 3.0" x 3.0" x 6.0"
Weight:	4477-A-S 2.5 lbs.
	4477-A2-S 4.0 lbs.

* Also available in 3/8" and 1/2" NPT connections.



Model No. 4466

Operation:	Timer operated, electronic
Valve Type:	Ball valve
Max. Pressure:	400 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	3/4" NPT
Outlet Connection:	3/4" NPT
Electrical:	115V-1PH-60HZ
Overall Size (W x D x H):	4.0" x 8.0" x 7.5"
Weight:	7.5 lbs.



Model No. 4444-H

Operation:	Float-operated, mechanical
Reservoir Capacity:	4 oz. Per cycle
Valve Type:	Orifice
Max. Pressure:	230 PSIG
Fluid Temp. Min-Max.:	35°F - 180°F
Inlet Connection:	1/2" NPT
Outlet Connection:	1/4" NPT
Overall Size (W x D x H):	4.1" x 6.0" x 4.1"
Weight:	3.0 lbs.



Distributed By:



PNEUMATECH INC.
and **ConservAIR**® Technologies Co. LLP

4909 70th Avenue • Kenosha, Wisconsin U.S.A. 53144
(262) 658-4300 Fax: (262) 658-1945
www.pneumatech.com



Use of this
Motor Challenge
logo does not imply
DOE endorsement.

