

R & PL SERIES

1.5—30 HORSEPOWER

RECIPROCATING AIR COMPRESSORS



PROVEN DESIGN.

PROVEN DEPENDABILITY.



At Champion, air compressor systems are our only products. We know and understand the application of our products in many different operating environments. Our goal is to provide you with the compressors that fulfill — and exceed — your expectations and requirements.

Because compressed air is an essential utility, dependability is an essential compressor quality. If your compressor goes down, it can hurt your reputation — and your bottom line. Champion reciprocating compressors are proven units, known for their reliability over decades of use. In addition to dependability, you want a compressor that is user-friendly. Champion comes through again, with a wide selection of configurations and options designed for trouble-free operation.

You can't beat a Champion!



R & PL SERIES

1.5—30 HORSEPOWER

RECIPROCATING AIR COMPRESSORS

## CHAMPION RECIPRO

### PROVEN DESIGN.

Today's Champion Reciprocating Compressors are the product of decades of design and development. In fact, we introduced the first single-stage compressor in 1919 and have continuously improved its design through innovations in materials, production techniques and quality control.





# LOCATING COMPRESSORS... THE VALUE LEADERS.

## PROVEN DEPENDABILITY.

You rely on compressed air to perform many tasks efficiently. Champion knows that reliability is one of the main reasons for a purchase. Our slow speed, built-in efficiency through design and the longest compressor warranty in the industry make Champion compressors the correct choice!

## HIGH PERFORMANCE.

R- and PL-Series compressors are loaded with features designed for day-in, day-out performance. For example, Champion's unique automotive-type domed piston design allows the use of large diameter, low lift valves, while minimizing clearance volume for maximum air delivery.

## LONG LIFE.

Features such as slow speed operation, rugged cast iron crankcase construction, corrosion resistant steel valves and tapered roller-type main bearings all contribute to long life.

## USER-FRIENDLY DESIGN.

A wide selection of configurations and available options, coupled with serviceability features make it easy to operate and maintain a Champion compressor. Compare all the features on the pages that follow. You'll discover why Champion is the value leader in reciprocating compressors for a broad range of automotive and industrial applications.



## THE SPLASH-LUBR

Loaded with rugged features, these splash-lubricated compressors

**MULTI-FINNED CYLINDERS**

Cooler operating temperatures result in longer life and consistent performance over time.

**INTEGRAL CYLINDER/HEAD**

Gasketless design eliminates the possibility of blown head gaskets for trouble-free operation.

**BALANCED PISTONS**

Aluminum alloy first-stage piston is weight-matched to the cast iron second-stage piston, ensuring proper balance.

**PISTON RINGS**

Three compression rings and one oil control ring provide excellent oil control, minimum blow-by and high efficiency air delivery.

**LIGHTWEIGHT CONNECTING RODS**


High-density, die-cast aluminum alloy rods minimize reciprocating weight. An integral, precision-bored crankpin bearing and a needle bearing for the piston pin properly distribute bearing loads for longer bearing life than bushings.

**PRESSURE RELIEF VALVES**

Located in interstage and discharge.


**INTERCOOLERS**

Large-diameter finned tubing is positioned to obtain the greatest cooling effect between stages for maximum compressor efficiency.

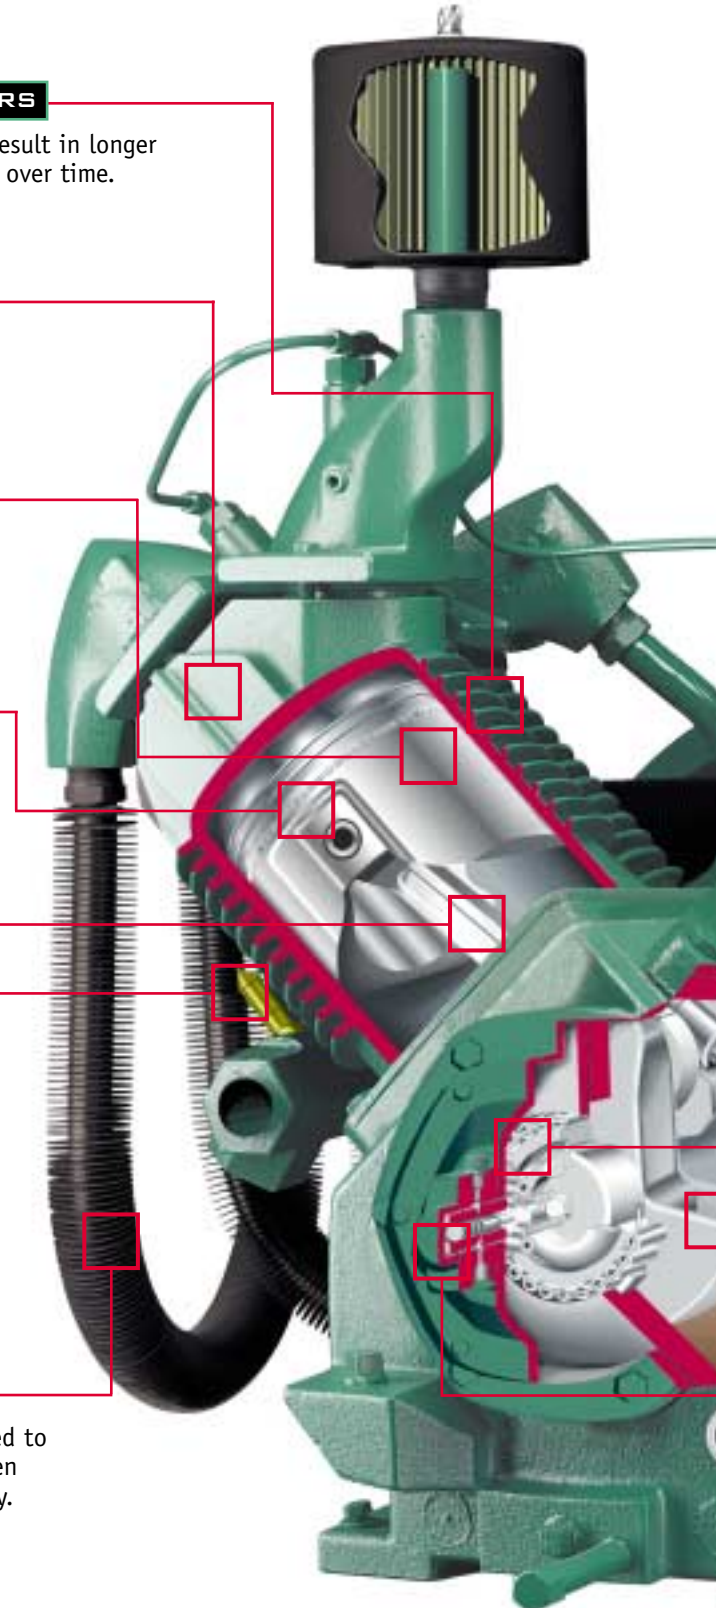

# ICATED R-SERIES

deliver high performance, long life and tremendous value.

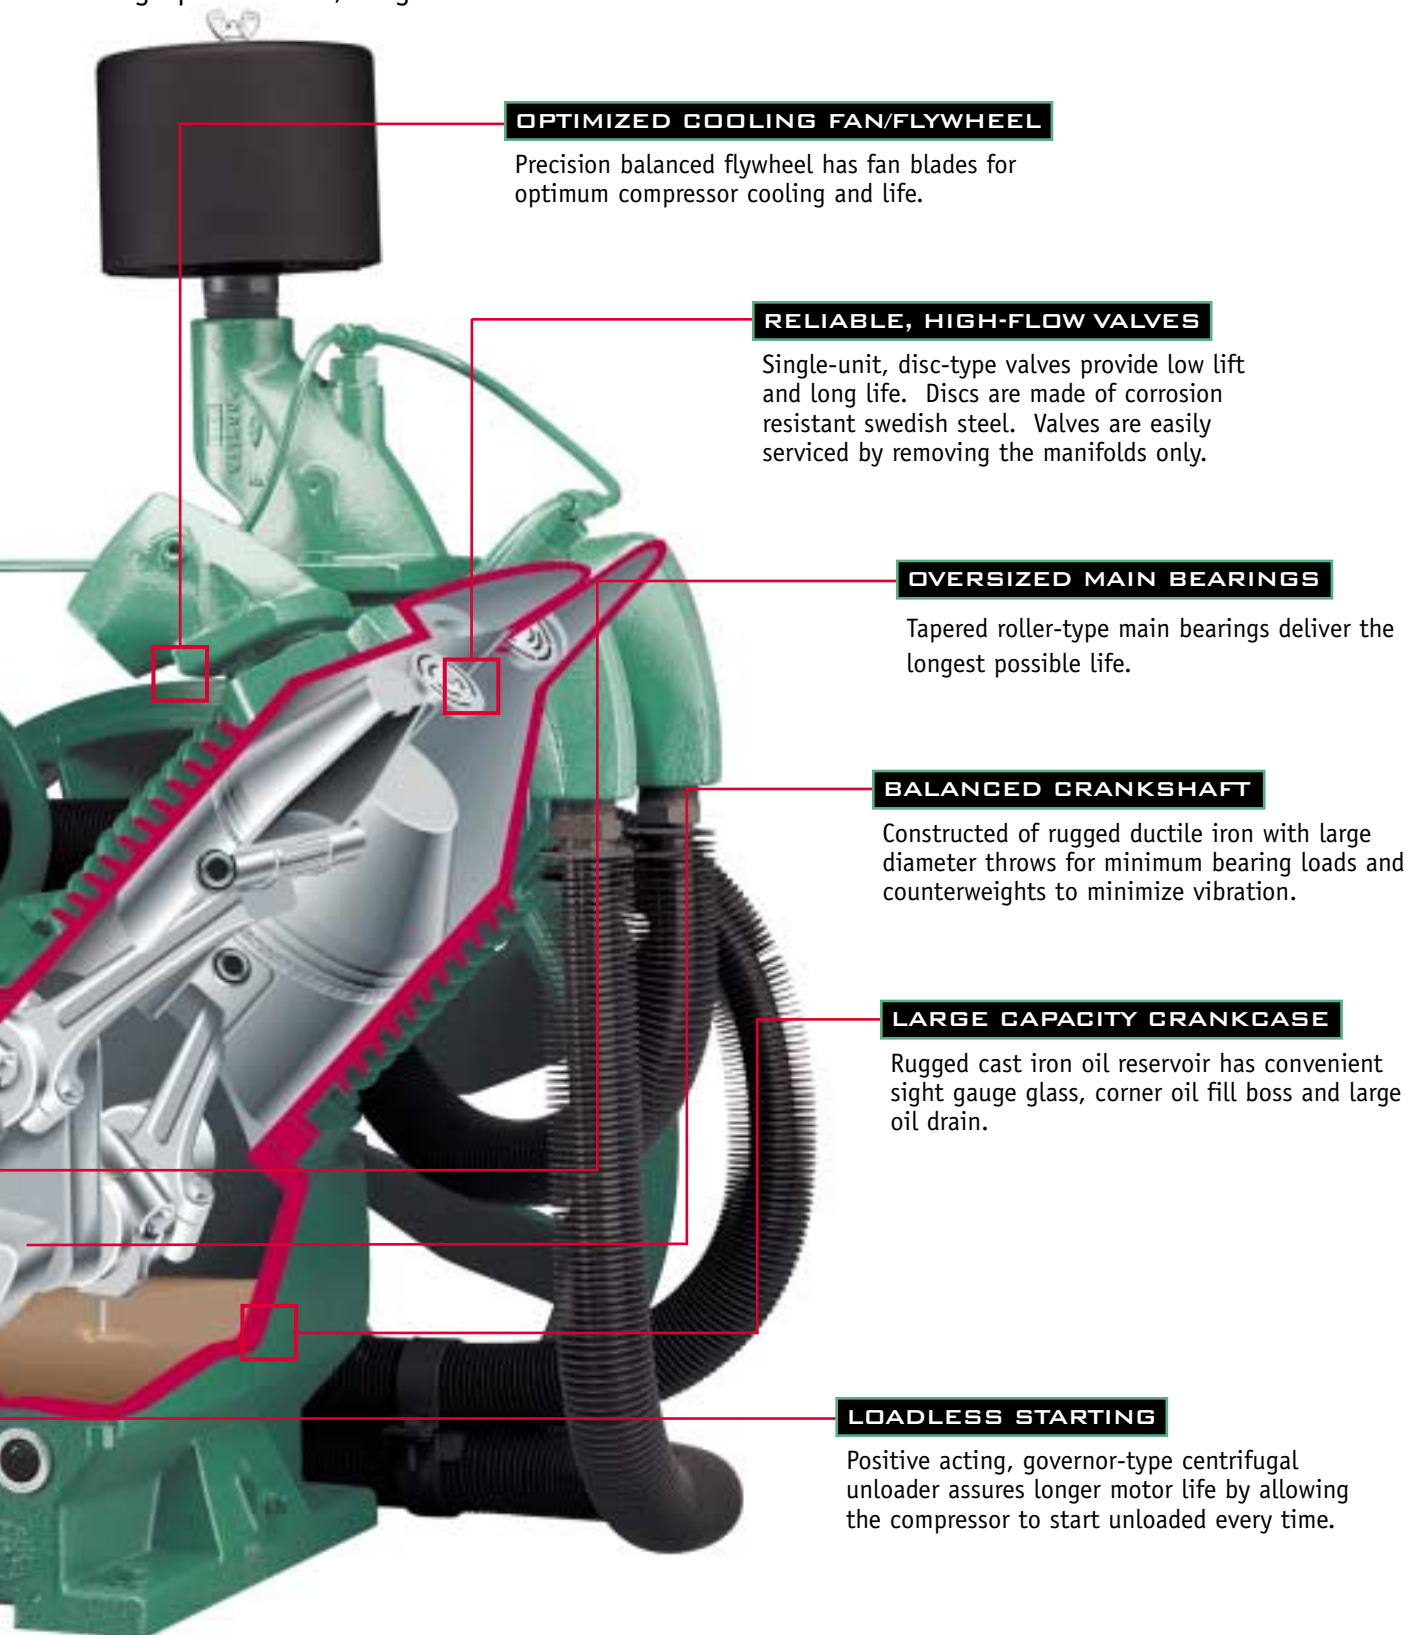

## **OPTIMIZED COOLING FAN/FLYWHEEL**

Precision balanced flywheel has fan blades for optimum compressor cooling and life.

## **RELIABLE, HIGH-FLOW VALVES**

Single-unit, disc-type valves provide low lift and long life. Discs are made of corrosion resistant swedish steel. Valves are easily serviced by removing the manifolds only.

## **OVERSIZED MAIN BEARINGS**

Tapered roller-type main bearings deliver the longest possible life.

## **BALANCED CRANKSHAFT**

Constructed of rugged ductile iron with large diameter throws for minimum bearing loads and counterweights to minimize vibration.

## **LARGE CAPACITY CRANKCASE**

Rugged cast iron oil reservoir has convenient sight gauge glass, corner oil fill boss and large oil drain.

## **LOADLESS STARTING**

Positive acting, governor-type centrifugal unloader assures longer motor life by allowing the compressor to start unloaded every time.



# THE PRESSURE-LUBRICATED PL-SERIES

The PL-Series compressor has been designed to operate in extreme duty applications and is also an alternative to an R-Series unit. Because the PL-Series can operate up to 250 psi, in remote locations or in off-level operations, it is a true industrial use compressor. Champion is so confident in the way it has engineered and built its products, it offers a 5-year warranty on the compressor pump. The PL-Series features domed pistons, integral cylinder head, disc valves and an oil pump that provides lubricant to all crucial parts of the compressor. From its extra heavy duty design to its ease of maintenance, the Champion PL-Series exemplifies reliability, durability and quality.

**PL SERIES**  
3—30 HORSEPOWER

**PRESSURE LUBRICATION**

Crankshaft and connecting rod bearings are pressure lubricated for extended life.

**OIL PRESSURE GAUGE**


Mounted on the front of the compressor for an excellent view and easy pressure monitoring.

**LOADLESS STARTING**

Hydraulic unloader with factory set pilot valve provides easy, loadless starts and low oil pressure protection for unattended operation.

**BABBITT BEARINGS**

Replaceable connecting rod crankshaft end bearings make repairs easy and inexpensive.

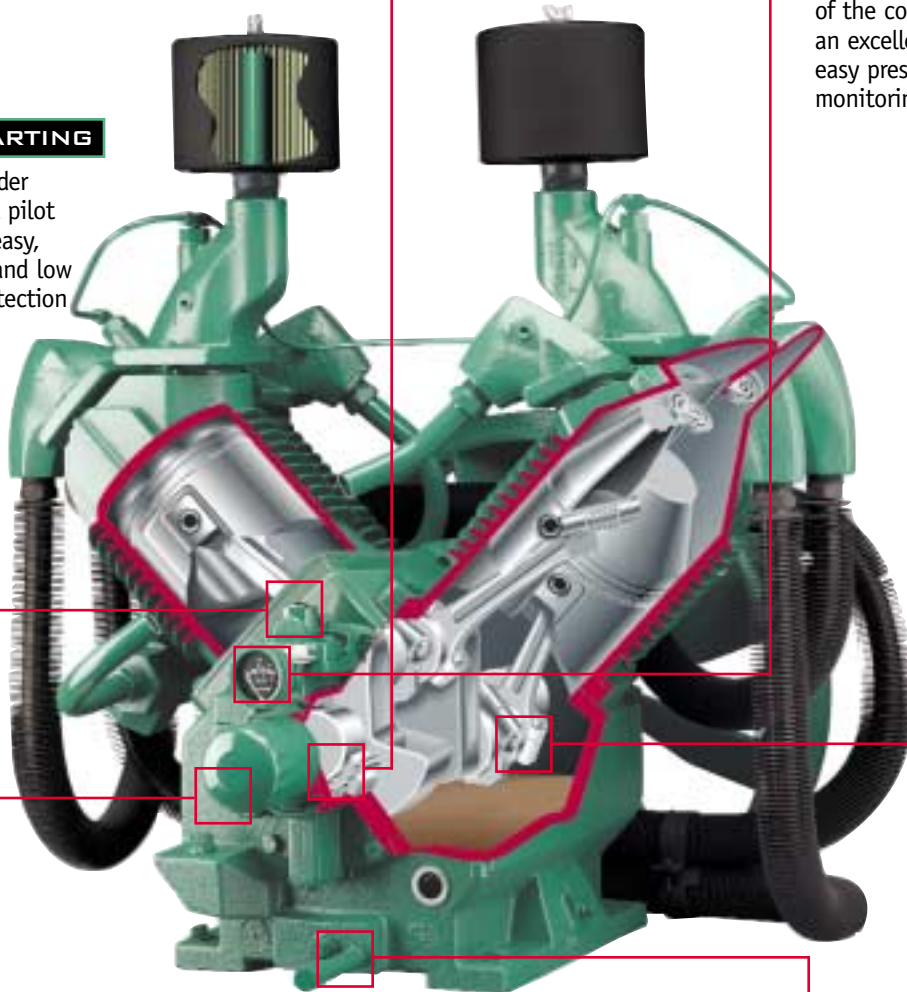

**POSITIVE DISPLACEMENT OIL PUMP**

Provides lubricant to all critical areas of the compressor pump that require lubrication.

**INTERNAL FILTRATION**

An oil inlet screen is located in the center of the crankcase to protect bearings from larger debris.

## SELECT THE CONFIGURATION THAT MATCHES YOUR APPLICATION.

With many models from which to choose in both single-stage and two-stage, we can match your needs exactly. These configurations, combined with a wide choice of options, provide all the components for a customized installation. They are available in both R-Series splash-lubricated and PL-Series pressure-lubricated models.

### TWO-STAGE, TANK-MOUNTED AIR COMPRESSORS

Available with horizontal or space-saving vertical tanks.



### TWO-STAGE, BASE-MOUNTED AIR COMPRESSORS

Designed for installations where air tanks are remotely located.



### TWO-STAGE, DUPLEX AIR COMPRESSORS

For extra air delivery when you need it without wasted space. Plus the flexibility of single operation, alternating between compressors, or duplex operation to meet high air demand.



### TWO-STAGE GASOLINE OR DIESEL ENGINE POWERED AIR COMPRESSORS

Take compressed air anywhere it is needed.



### TWO-STAGE BARE COMPRESSOR PUMPS

For pump replacement or OEM applications, for the ultimate in air system design.



## SELECT THE OPTIONS THAT MATCH YOUR NEEDS.

Many options are available to help you develop a Champion compressor package that exactly matches your specific operating requirements.

### **CHAMPION COMPRESSOR LUBRICANTS**

ChampLub lubricants are blended specifically for Champion compressors for use in harsh compressor environments. They are sourced from extremely stable base stocks and enhanced with carefully selected additive packages to provide long life and superior protection. ChampLub lubricants are suitable for a variety of applications and are available as a mineral oil, synthetic or food-grade synthetic.

Available in 55-gallon drums, five-gallon pails, one-gallon bottles and one-quart bottles.

### **MAGNETIC STARTER**

For thermal overload protection. Required for units 3 HP and up. May be mounted or unmounted.

### **AIR-COOLED OR WATER-COOLED AFTERCOOLER**

Removes up to 65% of the moisture from discharged compressed air.

### **AUTOMATIC TANK DRAIN (PNEUMATIC)**

Automatically removes water from air receiver upon demand. Eliminates the need for manual purging.

### **REFRIGERATED AIR DRYER**

Cools compressed air to a 33°-39° dew point, eliminating additional downstream condensation in the air line. Normally, a dryer should be used in conjunction with an aftercooler.

### **OIL MONITOR**

Monitors oil level. Unit is not allowed to start or restart if oil is not at the proper level. Operated through magnetic starter. (This is not an oil shutdown device.)

### **UL LISTED PACKAGES**

Special UL listed packages are available in 5 and 10 horsepower configurations using 230/3/60 electric motors. Contact the factory for exact specifications.



### **OTHER OPTIONS**

- Power Monitor shuts down unit in the event of single phasing, low voltage or phase reversal.
- Constant Speed Control prevents excessive motor start/stop cycles while saving energy.
- Dual Control allows compressor to run either in start/stop or constant speed mode.





# R & PL-SERIES BARE-PUMP DIMENSIONS

## R10D, R15B, PL-15

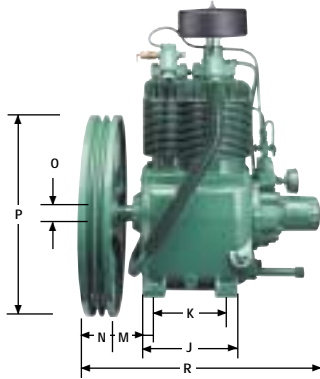
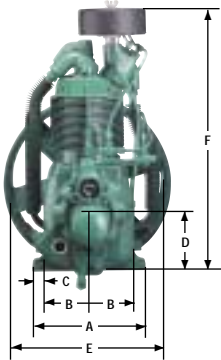


Item	R-10D R15B, PL-15 Inch	R-30D & PL-30 Inch	R-40A & PL-40 Inch	R-70A PL-70 Inch
A	10	11 <sup>1</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>
B	4 <sup>3</sup> / <sub>8</sub>	4 <sup>3</sup> / <sub>16</sub>	5 <sup>11</sup> / <sub>16</sub>	5 <sup>11</sup> / <sub>16</sub>
C	5/8	3/4	3/4	3/4
D	5 1/2	7	7 <sup>15</sup> / <sub>16</sub>	8 <sup>3</sup> / <sub>16</sub>
E	18	27	30	33
F	23 1/4	23 <sup>9</sup> / <sub>16</sub>	32	33 <sup>9</sup> / <sub>16</sub>
H	3/4" Tubing	3/4 NPT	1" Tubing	1 1/4 NPT
I	15/32	17/32	9/16	9/16
J	7 1/2	9 3/4	12	13 1/4
K	5 3/4	8 1/16	10	11 1/4
L	7/8	27/32	1	1
M	3	3 1/16	5 3/4	5 3/4
N	2 1/2	2 <sup>23</sup> / <sub>32</sub>	3 1/2	3 1/2
O	15/16	1 3/4	2 1/4	2 1/4
P	16 1/2	18 7/8	22	22
Q	2VB	2VB	3VB	3VB
R	20	22 <sup>3</sup> / <sub>8</sub>	27 1/2	28 1/2
Approximate Shipping Weight (lbs.)		125	220	440



## R-30 & PL-30

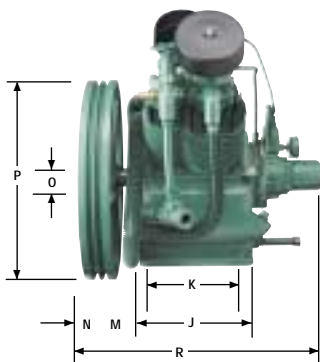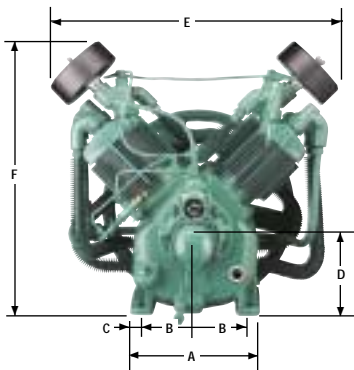

## R-40A & PL-40

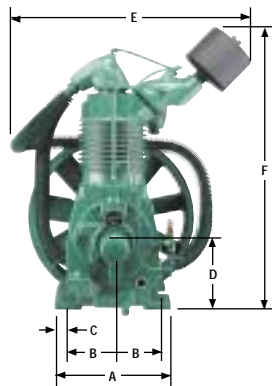


## R-70A & PL-70

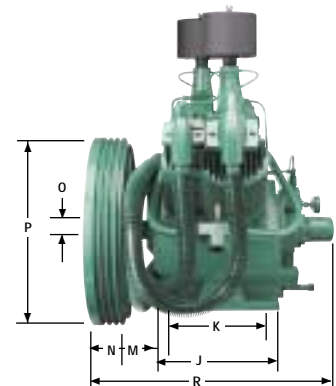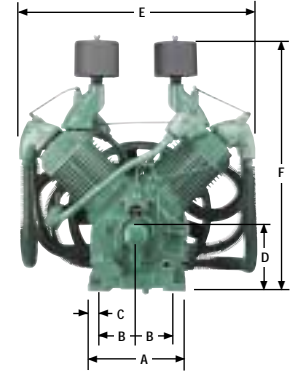

## SPLASH & PRESSURE LUBRICATED — HORIZONTAL TANK (ELECTRIC)

Horizontal Tank								125 PSI Rating*			175 PSI Rating*			250 PSI Rating*				
Motor HP	Tank Cap Gal.	Splash R-Series Model	Pump Comp. Model	Pressure PL-Series Model	Pump Comp. Model	L x W x H Dimensions inches	Aprox. Ship Wt. lbs.	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y		
1½	30	HR1-3	R-10D	—	—	41½ x 21 x 44¾	300	575	11.2	6.0	542	10.5	5.3	—	—	—		
	60	HR1-6		51½ x 22¾ x 48¾		400												
	80	HR1-8		66½ x 22¾ x 48¾		425												
2	30	HR2-3		41½ x 21 x 44¾		320	765	14.9	8.3	725	14.1	7.5	—	—	—			
	60	HR2-6		51½ x 22¾ x 48¾		425												
	80	HR2-8		66½ x 22¾ x 48¾		455												
3	60	HR3-6	R-15B	HPL3-6	PL-15	51½ x 22¾ x 48¾	425	485	14.1	10.9	440	12.8	9.7	380	11.0	8.0		
	80	HR3-8		HPL3-8		66½ x 22¾ x 48¾	485											
	120	HR3-12		HPL3-12		72½ x 24 x 55	725											
5	60	HR5-6		HPL5-6		51½ x 22¾ x 48¾	445	805	23.5	19.1	710	20.7	16.5	640	18.6	13.6		
	80	HR5-8		HPL5-8		66½ x 22¾ x 48¾	535											
	120	HR5-12		HPL5-12		72½ x 24 x 55	765											
7½	80	HR7F-8		R-30D		HPL7F-8	PL-30	66½ x 22¾ x 48¾	570	1035	29.9	24.6	1035	29.9	23.5	940	27.4	19.4
	120	HR7F-12				HPL7F-12		72½ x 24 x 55	800									
	80	HR7-8				HPL7-8		66½ x 22½ x 49¾	665									
120	HR7-12	HPL7-12				72½ x 24 x 55¼		860										
80	HR10-8	HPL10-8				66½ x 22½ x 49¾		675										
10	120	HR10-12				HPL10-12		72½ x 24 x 55¼	890	810	48.5	37.3	740	43.1	34.8	640	37.1	27.5
	250	HR10-25	—		—	87½ x 34¼ x 61¾		1283										
	80	HR15F-8	—		—	66½ x 22½ x 49¾		740	1045									
120	HR15F-12	HPL15F-12	72½ x 24 x 55¼		960													
250	HR15F-25	HPL15F-25	88½ x 31 x 60¾ <sup>16</sup>		1275													
15	120	HRA15-12	R-40A		HPL15-12	PL-40		73½ x 27¾ x 62½	1110	890	71.1	59.0	770	61.5	53.7	700	55.9	45.8
	250	HRA15-25			HPL15-25			88½ x 31 x 68¾	1495									
	120	HRA20-12		HPL20-12	73½ x 27½ x 64		1325	770	109.0									
250	HRA20-25	HPL20-25	88½ x 31 x 70¼	1790														
120	HRA25-12	HPL25-12	73½ x 27½ x 64	1365	890	127.8	102.1			770	109.4	90.1	660	93.7	76.8			
250	HRA25-25	HPL25-25	88½ x 31 x 70¼	1735														
120	HRA30-12	HPL30-12	73½ x 27½ x 64	1404				890	127.8							102.1	890	127.8
250	HRA30-25	HPL30-25	88½ x 31 x 70¼	1774														

NOTE: Pressure lubricated units are capable of 250 PSIG operation.

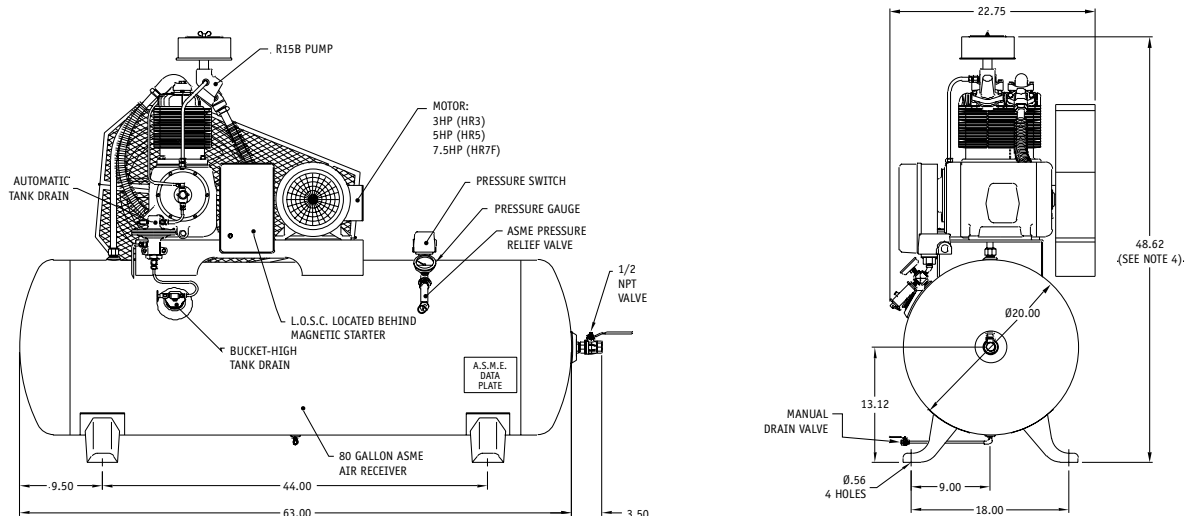

# SPECIFICATIONS

## SPLASH & PRESSURE LUBRICATED — VERTICAL TANK (ELECTRIC)

Vertical Tank								125 PSI Rating*			175 PSI Rating*			250 PSI Rating*		
Motor HP	Tank Cap Gal.	Splash R-Series Model	Pump Comp. Model	Pressure PL-Series Model	Pump Comp. Model	L x W x H Dimensions inches	Aprox. Ship Wt. lbs.	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y
1.5	60	VR1-6	R-10D	—	—	32 <sup>1</sup> / <sub>2</sub> x 22 <sup>1</sup> / <sub>2</sub> x 76 <sup>1</sup> / <sub>2</sub>	400	575	11.2	6.0	542	10.5	5.3	—	—	—
	80	VR1-8				32 x 24 x 77	425									
2	60	VR2-6				32 <sup>1</sup> / <sub>2</sub> x 22 <sup>1</sup> / <sub>2</sub> x 76 <sup>1</sup> / <sub>2</sub>	425	765	14.9	8.3	725	14.1	7.5	—	—	—
	80	VR2-8				32 x 24 x 77	455									
3	60	VR3-6	R-15B	VPL3-6	PL-15	32 <sup>1</sup> / <sub>2</sub> x 22 <sup>1</sup> / <sub>2</sub> x 76 <sup>1</sup> / <sub>2</sub>	425	485	14.1	10.9	440	12.8	9.7	380	11.0	8.0
	80	VR3-8		VPL3-8		32 x 24 x 77	485									
		120		VR3-12		VPL3-12	42 <sup>1</sup> / <sub>2</sub> x 30 x 80 <sup>1</sup> / <sub>2</sub>									
5	60	VR5-6		VPL5-6	32 <sup>1</sup> / <sub>2</sub> x 22 <sup>1</sup> / <sub>2</sub> x 76 <sup>1</sup> / <sub>2</sub>	455	805	23.5	19.1	710	20.7	16.5	640	18.6	13.6	
	80	VR5-8		VPL5-8	33 x 24 x 77	535										
	120	VR5-12		VPL5-12	42 <sup>1</sup> / <sub>2</sub> x 30 x 82	765										
7 <sup>1</sup> / <sub>2</sub>	80	VR7F-8	VPL7F-8	33 x 24 x 77	570	1035	29.9	24.6	1035	29.9	23.5	940	27.4	19.4		
	120	VR7F-12	VPL7F-12	42 <sup>1</sup> / <sub>2</sub> x 30 x 82	800											
	80	VR7-8	R-30D	VPL7-8	42 <sup>1</sup> / <sub>2</sub> x 30 x 82										665	670
120	VR7-12	R-15B	VPL7-12	46 <sup>3</sup> / <sub>8</sub> x 30 x 82	800											
10	80	VR10-8	R-30D	VPL10-8	PL-30	42 <sup>1</sup> / <sub>2</sub> x 30 x 66 <sup>3</sup> / <sub>4</sub>	860	810	48.5	37.3	740	43.1	34.8	640	37.1	27.5
	120	VR10-12	VPL10-12	46 <sup>3</sup> / <sub>8</sub> x 30 x 80 <sup>3</sup> / <sub>4</sub>		890										
15	120	VR15F-12	PL-40	—	—	46 <sup>3</sup> / <sub>8</sub> x 30 x 80 <sup>3</sup> / <sub>4</sub>	890	1045	63.5	50.2	1045	63.5	49.0	900	52.5	42.6

NOTE: Pressure lubricated units are capable of 250 PSIG operation.

## SPLASH & PRESSURE LUBRICATED — TWO-STAGE (ENGINE DRIVEN)

Motor HP	Tank Cap Gal.	Splash R-Series Model	Pump Comp. Model	Pressure PL-Series Model	Pump Comp. Model	L x W x H Dimensions inches	Splash Aprox. Ship Wt. lbs.	Pressure Aprox. Ship Wt. lbs.	175 PSI Rating**			250 PSI Rating**		
									RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y
8	30	HGR3-3	R-15B	HGPL3-3	PL-15	38 x 22 <sup>3</sup> / <sub>4</sub> x 45	345	345	600	17.9	14.3	—	—	—
***1	30	HGR5-3		HGPL5-3		38 x 22 <sup>3</sup> / <sub>4</sub> x 45 <sup>1</sup> / <sub>2</sub>	409	450						
	8	HGR5-LP		HGPL5-LP		39 <sup>7</sup> / <sub>8</sub> x 21 <sup>9</sup> / <sub>16</sub> x 34 <sup>3</sup> / <sub>4</sub>	404	445						
	—	BGR5		BGPL5		36 <sup>1</sup> / <sub>2</sub> x 21 x 28 <sup>3</sup> / <sub>4</sub>	279	320						
	60	HGR5-6H		HGPL5-6H		32 <sup>1</sup> / <sub>2</sub> x 21 x 48	475	514						
12 <sup>1</sup> / <sub>2</sub>	80	HGR5-8		HGPL5-8		66 <sup>1</sup> / <sub>2</sub> x 21 x 51	514	555	1025	29.9	23.2	—	—	15.5
	30	HGR6-3	HGPL6-3	38 x 22 <sup>3</sup> / <sub>4</sub> x 45 <sup>1</sup> / <sub>2</sub>	399	440								
	60	HGR6-6K	HPL6-6H	32 <sup>1</sup> / <sub>2</sub> x 21 x 48	475	514								
	80	HGR6-8	HGPL6-8	66 <sup>1</sup> / <sub>2</sub> x 21 x 51	514	555								
—	BGR6	BGPL-6	40 x 21 x 29 <sup>1</sup> / <sub>4</sub>	279	279									
20	80	HGR10-8	R-30D	HGPL10-8	PL-30	66 <sup>1</sup> / <sub>2</sub> x 21 x 49 <sup>3</sup> / <sub>4</sub>	715	715	765	44.6	34.4	—	—	—
23	5	BGR-12	BGPL-12	46 x 28 x 35 <sup>5</sup> / <sub>8</sub>		645	645	940	55.0	39.5	—	—	—	
27	4 (2)	BDRA-15	R-40A	BDPL-15	PL-40	52 x 29 x 42	813	813	910	72.8	59.0	—	—	—
30	5	BGRA-15		BGPLA-15		63 x 41 x 49	1075	1075						
*10	30	HDR5-3	R-15B	HDPL-15	PL-15	38 x 32 x 46	500	500	710	20.7	16.5	650	18.9	13.6
	—	BDR5		BDPL-5		38 <sup>3</sup> / <sub>4</sub> x 21 x 29 <sup>3</sup> / <sub>4</sub>	493	493				—	—	—

NOTE: Pressure lubricated units are capable of 250 PSIG operation. \*Diesel Driven \*\*Units tested in accordance with CAGI/PNEUROP Acceptance Test Code PN2CPTC3. \*\*\*Honda Engine Only



**SPLASH & PRESSURE LUBRICATED — BASE MOUNT (ELECTRIC)**

Motor HP	Splash R-Series Model	Pump Comp. Model	Pressure PL-Series Model	Pump Comp. Model	L x W x H Dimensions inches	Aprox. Ship Wt. lbs.	125 PSI Rating*			175 PSI Rating*			250 PSI Rating*			
							RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y	
1½	BR-1	R-10D	—	—	29½ x 21 x 29¼	205	575	11.2	6.0	542	10.5	5.3	—	—	—	
2	BR-2		—	—			205	765	14.9	8.3	725	14.1	7.5	—	—	—
3	BR-3	R-15B	BPL-3	PL-15	30¾ x 21 x 29¼	230	485	14.1	10.9	440	12.8	9.7	380	11.0	8.0	
5	BR-5		BPL-5				280	805	23.5	19.1	710	20.7	16.5	640	18.6	13.6
7½	BRF-7		BPL-7F				310	1035	29.9	24.6	1035	29.9	23.5	940	27.4	19.4
7½	BR-7	R-30D	BPL-7	PL-30	42¾ x 22½ x 28¾ <sup>16</sup>	430	670	39.6	30.0	575	33.5	25.8	520	30.2	21.3	
10	BR-10		BPL-10				540	810	48.5	37.3	740	43.1	34.8	640	37.1	27.5
15	BRF-15	R-40A	BPL-15F	PL-40	49½ x 26¼ x 38	550	1045	63.5	50.2	1045	63.5	49.0	900	52.5	42.6	
15	BRA-15		BPL-15				730	890	71.1	59.0	770	61.5	53.7	700	55.9	45.8
20	BRA-20		BPL-20				1000	770	109.0	91.9	655	93.0	76.7	545	77.4	64.1
25	BRA-25	R-70A	BPL-25	PL-70	53 x 27½ x 39½	1020	890	127.8	102.1	770	109.4	90.1	660	93.7	76.8	
30	BRA-30		BPL-30				1059	890	127.0	102.1	890	127.0	101.1	770	109.4	90.0

**SPLASH & PRESSURE LUBRICATED — TANK-MOUNTED DUPLEX UNITS (ELECTRIC)**

Motor HP	Tank Cap Gal.	Splash R-Series Model	Pump Comp. Model	Pressure PL-Series Model	Pump Comp. Model	L x W x H Dimension inches	Aprox. Ship Wt. lbs.	125 PSI Rating*			175 PSI Rating*			250 PSI Rating*		
								RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y	RPM	CFM Displ.	CFM Del'y
3 (2)	80	HR3D-8	R-15B	—	—	67½ x 28½ x 50¼	725	485	28.2	21.8	440	25.6	19.4	—	—	—
	120	HR3D-12		—	—	91¾ x 26½ x 48¾	950	485	28.2	21.8	440	25.6	19.4	—	—	—
5 (2)	80	HR5D-8	R-15B	HPL5D-8	PL-15	67½ x 28½ x 50¼	755	805	47.0	38.2	710	41.4	33.0	640	37.2	27.2
	120	HR5D-12		HPL5D-12		91¾ x 26½ x 48¾	980	805	47.0	38.2	710	41.4	33.0	640	37.2	27.2
7½ (2)	250	HR7D-12	R-30D	HPL7D-12	PL-30	91¾ x 26½ x 50¼	1305	670	79.2	60.0	575	67.0	51.6	520	60.4	42.6
		HR7DF-25	R-15B	HPL7DF-25	PL-15	87½ x 32 x 64	1485	1035	59.8	49.2	1035	59.8	47.0	940	54.8	38.8
10 (2)	250	HR7D-25	R-30D	HPL7D-25	PL-30		87½ x 32 x 64	1675	670	79.2	60.0	575	67.0	51.6	520	60.4
		HR10D-25		HPL10D-25		1725		810	97.0	74.6	740	86.2	69.6	640	74.2	55.0
15 (2)	250	HR15DF-25	R-40A	HPL15DF-25	PL-40	88½ x 55 x 73½	1860	1045	127.0	100.4	1045	127.0	98.0	900	105.0	85.2
20 (2)		HRA15D-25		HPL15D-25			2460	890	142.2	118.0	770	123.0	107.4	700	111.8	91.6
20 (2)	250	HRA20D-25	R-70A	HPL20D-25	PL-70	88½ x 62 x 74¾	2845	770	218.0	183.8	655	186.0	153.4	545	154.8	128.2
25 (2)		HRA25D-25		HPL25D-25			2940	890	255.6	204.2	770	218.8	180.2	660	187.4	153.6
30 (2)	250	HR30D-25	R-70A	HPL30D-25	PL-70	88½ x 62 x 74¾	3018	890	255.6	204.2	890	255.6	202.0	770	218.8	180.0

**R/PL-SERIES/BARE PUMPS**

Motor HP	Splash Comp. Model	Pressure Comp. Model	Displ./Rev (cu. ft.)	125 PSIG Rating*		175 PSIG Rating*		250 PSIG Rating*		Bores in. dia.	Stroke in.	No. cyl.	Oil Cap. qts.	Max. Oper Pressure (PSIG)	Aprox. Ship Wt. lbs.
				RPM	CFM Del'y	RPM	CFM Del'y	RPM	CFM Del'y						
1½	R-10D	—	.01942	575	6.0	542	5.3	—	—	4⅝ & 2½	2	2	175	125	
2				765	8.3	725	7.5	—	—						
3	R-15B	PL-15A	.02916	497	11.8	440	9.7	380	8.0	4⅝ & 2½	3	2	175	125	
5				805	19.1	710	16.5	640	13.6						
7½				1035	24.6	1035	23.5	940	19.4						
10	R-30D	PL-30A	.05828	670	30.0	575	25.8	520	21.3	4⅝ & 2½	4	4	175	220	
15				810	37.3	740	34.8	640	27.5						
15	R-40A	PL-40A	.0800	890	59.0	770	53.7	700	45.8	6¼ & 3¼	4½	2	4	440	
20	R-70A	PL-70A	.1420	770	91.9	655	76.7	545	64.1						
25				890	102.1	770	90.1	660	76.8						
30				890	102.1	890	101.0	770	90.0						

Note: Pressure Lubricated units are capable of 250 PSIG operation \*Units tested in accordance with CAGI/PNEUROP Acceptance Test Code PN2CPTC2.

# THE CHAMPION ASSEMBLED UNIT WARRANTIES

## COMPRESSOR PUMP WARRANTY

Each new Champion Assembled Unit has a five (5) year warranty on the compressor pump only, against defects in materials or workmanship under normal use and service, from the date of installation or sixty-six (66) months from the date of shipment by Champion or a Champion distributor, whichever may occur first.

The five-year extended warranty covers parts and labor and is prorated over the five years as follows:

Year One — 100% coverage

Year Two — 90% coverage

Year Three — 80% coverage

Year Four — 70% coverage

Year Five — 60% coverage

*Head valves are warranted for Year One only.* Champion makes no warranty on components and/or accessories furnished to Champion by third parties, such as electric motors, gasoline engines and controls. These are warranted only to the extent of the original manufacturer's warranty to Champion. Electric motors must be equipped with thermal overload protection to have warranty consideration.

The extended five-year warranty will apply to ASME air receivers if they are installed on rubber vibro isolator pads or approved equivalent.

## NEW!

## 5 YEAR ELECTRIC MOTOR WARRANTY

Any Champion package purchased after January 1, 2003 built with a Baldor or Toshiba electric motor are warranted for 60 months from start-up or 63 months from shipment. Other manufacturer's motors furnished due to customer request or special requirements carry the motor manufacturer's warranty.

## PACKAGE WARRANTY

Champion warrants each new air compressor package to be free from defects in material and workmanship under normal use and service for a period of one year (12 months) from the date of installation or 15 months from the date of shipment by Champion.

## LIMITED WARRANTY

Warranty shall not apply to any equipment which has been subjected to misuse, neglect or accident, nor shall it apply to any equipment that has been repaired or altered by any person(s) not authorized by Champion. Failure caused by lack of proper maintenance is not covered by warranty.

In no event shall Champion be liable for consequential damages or contingent liabilities arising out of failure of any compressor or part to operate properly. When a compressor pump or component is changed or replaced during the warranty period, the new/replaced item(s) is warranted for only the remainder of the original warranty period. Complete warranty details are included in compressor operating manual.

## ALWAYS EXPECT MORE FROM CHAMPION.

Your Champion distributor has the tools and expertise to serve you in every way. Whether you are looking for parts, service or advice, your Champion distributor will help you maximize the return on your compressor investment.

Backed by solid warranty protection, Champion compressors are supported by a worldwide parts and service network dedicated to returning your compressor to service as quickly as possible.

Champion is now better able than ever to bring you the products, service and know-how that separate the leaders from the rest of the pack. Drawing on decades of experience, we have the products you need to keep you on the cutting edge of productivity and profitability.

Contact your Distributor for the new Reciprocating Compressor Service Kits.



1301 North Euclid Avenue  
Princeton, Illinois 61356 USA  
Phone 815/875-3321  
Fax 815/872-0421  
E-mail: [Champion@championpneumatic.com](mailto:Champion@championpneumatic.com)  
[www.championpneumatic.com](http://www.championpneumatic.com)

ONE COMPANY.  
ONE SOURCE.